




**RITELITE**  
(SYSTEMS) LTD

DATA SHEET

# K20 POWER HEAD DUAL BEAM

A dimmable high power LED adjustable flood light for multiple applications

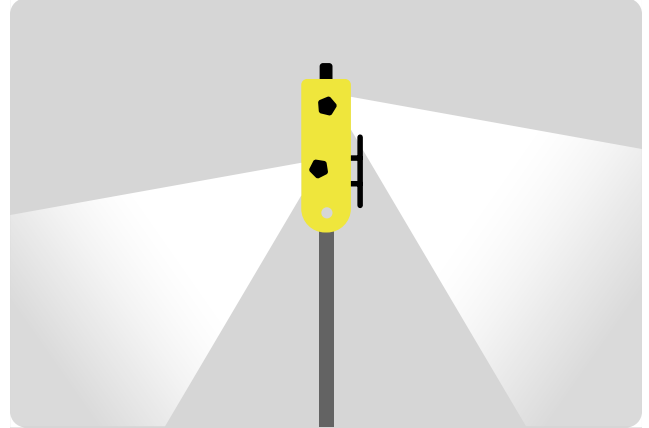

Single Direction Setup



Dual Direction Setup

## FEATURES

- Rugged high-power LED flood head for professional use
- A compact low weight work light
- Multitude of applications
- Multi-adjustable light head and modules to achieve desired illumination
- Low glare optical path
- Slim design with ergonomic carrying handle
- Suitable for use with many tripod systems
- Adjustable low & high light settings

## OPTIONS



Magnetic Bracket



Linkable Light Heads



Different Tripod Mountings Available




Integrated Cable Storage

Ritelite (Systems) Ltd, Meadow Park, Bourne Road, Essendine, Stamford, Lincolnshire, PE9 4LT  
Tel. 01780 758585 Fax. 01780 765700 E-Mail. [sales@ritelite.co.uk](mailto:sales@ritelite.co.uk) Web. [www.ritelite.co.uk](http://www.ritelite.co.uk)



Dual direction lighting mode with individually adjustable lighting modules

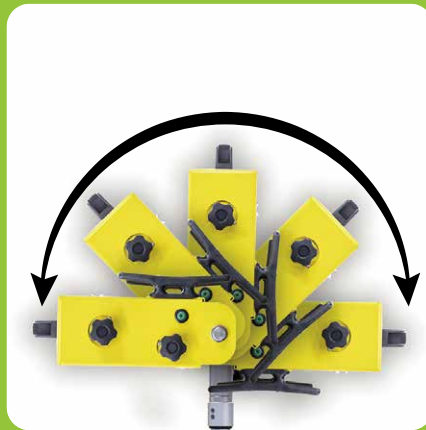

180 degree vertical adjustment









360 degree horizontal rotation through cylindrical locking spigot system



Ritelite K20 Power Head	Specification
Light Source	Twin LED module with individual positioning
Power	100 to 200W (Low to high power)
Light Output	15,000 lumens (low) to 27,000 lumens (high) @ 6400K
Beam Angle	60 degrees
Longevity	50,000 hours
Input	90-305V AC 50/60Hz >0.98 power factor (multiple plug options available)
Operating Temperature Range	-20°C to +40°C
Dimensions (W x H x D)	400mm x 130mm x 390mm (including tripod mount)
Weight	4.85Kg (Linkable option 5.2Kg)
Construction	Powder coated aluminium
Cable length	5-10m heavy duty cable (optional)
IP Class	IP65 (Electrical connector dependant)



## PRODUCT OPTIONS

Product Code	Description	Image
K20-2	K20 200W bidirectional - single connection	
K20-2D	K20 200W bidirectional - daisy chain connection	
K20-T4M	All terrain tripod (inc. male stud) Dimensions: - Closed 1320mm x 180mm - Open 4000mm x 1500mm Weight: 8.7kg	
K20-MB	K20 magnetic bracket	
K20-MBQ	K20 heavy duty quad magnetic bracket	
K20-TAB	K20 twin head adaptor	
K20-SB	K20 scaffold bracket	