




**RITELITE**  
(SYSTEMS) LTD

DATA SHEET

# K21 GANTRY LIGHT

Rugged high-power LED flood head for high lighting demands over wide area applications

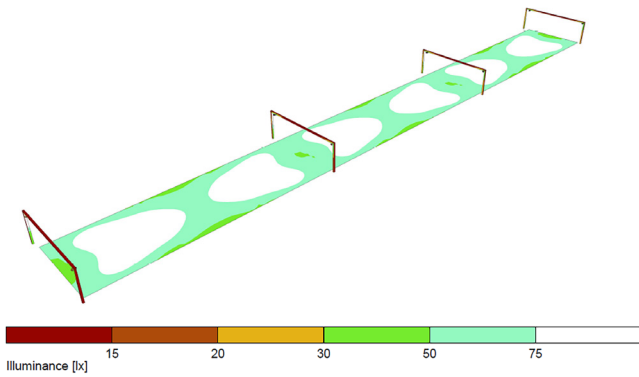

This light plot shows typical application. This rail site is 150m long by 16m wide. 4pcs K21 Beam Control are used per each of the three sections above hitting a minimum of 50 lux.



## FEATURES

- Advanced beam control optics for optimised light spread
- High levels of uniformity and no dark spots
- Minimal light spill / pollution
- Beam control prevents light being wasted and spilt where not wanted
- Maximum efficiency achieved
- Only 220W of power
- Compact low weight
- Twin element hybrid optics
- Configurable to single or twin mounting
- Magnet mounting / Pole / Fence mounting options






Ritelite (Systems) Ltd, Meadow Park, Bourne Road, Essendine, Stamford, Lincolnshire, PE9 4LT  
Tel. 01780 758585 Fax. 01780 765700 E-Mail. [sales@ritelite.co.uk](mailto:sales@ritelite.co.uk) Web. [www.ritelite.co.uk](http://www.ritelite.co.uk)



Ritelite K21 Gantry Light	Specification
Light Source	Twin Beam Control LED module
Power	220W
Light Output	32,000 lumens (high) @ 6400K
Beam Angle	Hybrid Beam Control and 25 Degree projection
Longevity	50,000 hours
Input	90-305V AC 50/60Hz >0.98 power factor (multiple plug options available)
Operating Temperature Range	-20°C to +40°C
Dimensions (W x H x D)	320mm x 220mm x 310mm (including tripod mount)
Weight	5.3Kg
Construction	Powder coated aluminium / steel
Cable	5-10m heavy duty cable (optional) Daisy chain in / out (optional)
IP Class	IP65 (Electrical connector dependant)

## PRODUCT OPTIONS

Product Code	Description	Image
K20-MB	K20 / K21 magnetic bracket	
M20-MBQ	K20 / K21 heavy duty quad magnetic bracket	
K20-TAB	Twin head adapter for K20 / K21 heavy duty quad magnetic bracket	
K20-SB	K20 / K21 scaffold bracket	